

Matrox Corona-II

Camera Interface Application Note

HITACHI KP-FD30M

July 11, 2007

Basics about the camera

Camera Descriptions

- Effective resolution: $640 \times 480 \times 8\text{-bits}$ @ 60 fps.
- Analog RGB video output.
- Progressive scan.
- Internal or external sync.
- Internal or external exposure control.
- 24.5656 MHz pixel clock rate.

Interface Mode

- Continuous
- Pseudo-continuous (External Trigger)
- Asynchronous reset (External Trigger)

Camera Interface Briefs

Mode 1: Continuous

- $640 \times 480 \times 8\text{-bits}$ @ 60 fps.
- Analog RGB video.
- Matrox Corona-II receiving Sync and video signals from camera.
- DCF used: [KPFD30M_640x480Con.DCF](#)



VIDEO (RGB)
SYNC



Mode 2: Pseudo-continuous

- Up to $640 \times 480 \times 8\text{-bit}$.
- Analog RGB video
- Matrox Corona-II sending EXPOSURE1 (TRIG) signal to camera to initiate and control the exposure.
- Matrox Corona-II receiving Sync and video signals from camera.
- DCF used: [KPFD30M_640x480Pcon.DCF](#)

Continued...

Mode of operations as per Matrox Imaging (in parentheses as per camera manufacturer)

Basics about the interface modes

Matrox Corona-II

Camera Interface Application Note


HITACHI KP-FD30M

July 11, 2007

Basics about the
interface modes


Camera Interface Briefs

Mode 2: Pseudo-continuous

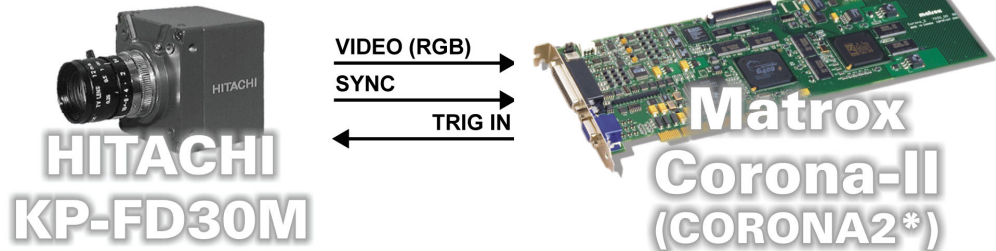

Mode 3: Asynchronous reset

- Up to $640 \times 480 \times 8$ -bit.
- Analog RGB video
- Matrox Corona-II receiving external trigger signal.
- Matrox Corona-II sending EXPOSURE1 (TRIG) signal to camera to initiate and control the exposure.
- Matrox Corona-II receiving Sync and video signals from camera.
- DCF used: [KPF30M_640x480Async.DCF](#)

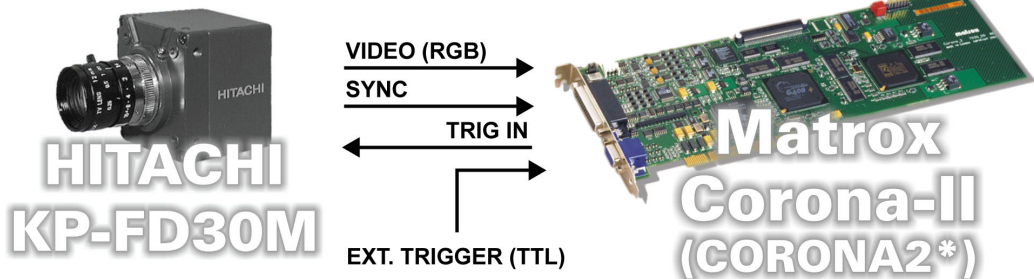

Specifics about the
interface modes

Camera Interface Details

Mode 1: Continuous

- **Frame rate:** Matrox Corona-II receives the continuous video from the camera at 60 frames per second.
- **Exposure time:** Exposure time is determined by the shutter setting. Refer to the camera manual for more information.
- **Camera settings:** Use the on-screen display menu to set the camera's electronic shutter mode to OFF or VARIABLE.

Matrox Corona-II

Camera Interface Application Note

HITACHI KP-FD30M

July 11, 2007

Specifics about the
interface modes

Camera Interface Details (cont.)

Mode 2: Pseudo-continuous

- **Frame rate:** Matrox Corona-II receives the continuous video from the camera at 60 frames per second.
- **Exposure time:** Exposure time is determined by the shutter setting. Refer to the camera manual for more information.
- **Camera settings:** Use the on-screen display menu to set the camera's electronic shutter mode to OFF or VARIABLE.

Mode 3: Asynchronous Reset

- **Frame rate:** The frame rate is determined by the frequency of the external trigger signal. The maximum possible frame rate is dependent on the exposure time as well as the camera's frame readout period.
- **Exposure time:** The width (falling edge to rising edge) of the EXPOSURE1 (TRIG) signal is the exposure time, which can be modified in the DCF using Matrox Intellicam or with the MIL MdigControl() function. Consult the respective manual for more information.
- **Camera settings:** Use the on-screen display menu to set the camera's electronic shutter mode to EXTERNAL TRIGGER and trigger mode to ONE TRIG.

Cabling Requirements

Modes 1 and 2: Continuous/ Pseudo-continuous

- **Cable:** DH44-TO-8BNC/O (open ended) cable required for video and synchronization signals.
- **Connection:** Connections between the DB-15 connector (RGB terminal) of the camera and the 44-pin connector of the Matrox Corona-II are as follows:

HITACHI KP-FD30M (15-pin connector)			CORONA2 (44-pin connector)	
Pin name	Pin no.		Pin name	Pin no.
R (RED)	01	→	VID1_IN1	15
GND	05	--	--	--
G (GREEN)	02	→	VID1_IN2	44
GND	06	--	--	--
B (BLUE)	03	→	VID1_IN3	13
GND	07	--	--	--
HD/Sync	13	→	SYNC_IN	43
TRIG	10*	←	EXP(1)	38*

* This connection is not necessary for this mode however allows the same cable to be used with both modes.

Cabling details for the
interface modes

Matrox Corona-II

Camera Interface Application Note

HITACHI KP-FD30M

July 11, 2007

*Cabling details for the
interface modes*

Cabling Requirements

Mode 3: Asynchronous reset

- **Cable:** DH44-TO-8BNC/O (open ended) cable required for video, synchronization and control signals.
- **Connection:** Connections are as in Mode 1: Continuous including the following:

H/ TRIGGER SOURCE			CORONA2 (44-pin connector)	
Pin name	Pin no.		Pin name	Pin no.
H/W TRIG Cable	--	→	OPTOTRIG +	35
GND	--		OPTOTRIG -	34

The DCF(s) mentioned in this application note can be found on our FTP site (<ftp.matrox.com/pub/imaging/>). The information furnished by Matrox Electronics System, Ltd. is believed to be accurate and reliable. Please verify all interface connections with camera documentation or manual. Contact your local sales representative or Matrox Sales office or Matrox Imaging Applications at 514-822-6061 for assistance.

Matrox Electronic Systems Ltd.

1055 St. Regis Blvd.
Dorval, Quebec H9P 2T4
Canada
Tel: (514) 685-2630
Fax: (514) 822-6273

COR2-CID-022

