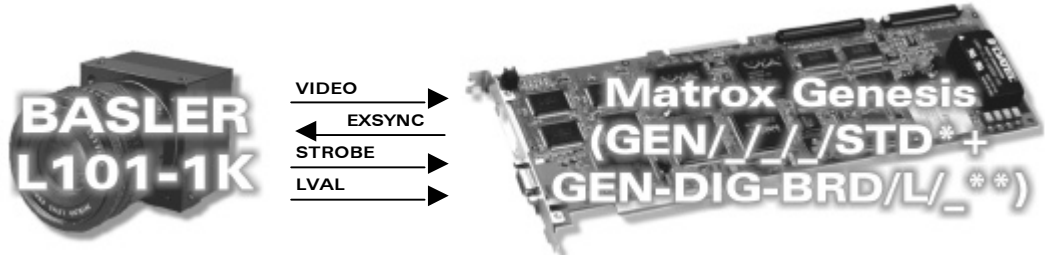


Application Note:

Interfacing non-standard cameras to Matrox Genesis

BASLER-MVC L101-1K

November 5, 1999

Camera Descriptions	<ul style="list-style-type: none"> • 1024 × 8-bit. • Single or dual channel LVDS digital output. • External exposure control. • Pixel Clock: 20 MHz.
Interface mode	<ul style="list-style-type: none"> • Fixed line scan rate
Camera Interface Briefs	<p>Mode: Fixed line scan rate</p>  <p>*Matrox Genesis main board with grab module **Matrox LVDS digital data input board</p> <ul style="list-style-type: none"> • 1024 × 8-bit. • Single channel LVDS digital. • DCF configured for 400 lines per virtual frame. • Line scan rate is fixed and determined by the frequency of the EXSYNC signal. • Matrox Genesis sending EXPOSURE1 (EXSYNC) signals to camera; the EXPOSURE1 (EXSYNC) signal controls line readout and exposure time. • Matrox Genesis receiving PIXEL CLOCK (STROBE @ 20 MHz) and HSYNC (LVAL) signals from camera; a high LVAL signal indicates valid pixels. • DCF used: GL120F.DCF (requires GNL 2.07 or higher)
Camera Interface Details	<p>Mode: Fixed line scan rate</p> <ul style="list-style-type: none"> • Line rate: The EXPOSURE1 (EXSYNC) frequency determines the line rate of the camera. The EXPOSURE1 (EXSYNC) period is currently set to 1060 pixels. With a 20 MHz pixel clock rate, the line rate is 18.8 kHz. • Exposure time: There are three modes of exposure time control which, can be selected by programming the EXPOSURE menu tab located in the BASLER Configuration Tool L1x0. See Camera User Manual for more information. Note this tool (dated 7-30-99) requires Windows NT with service pack 5 to install properly. <ul style="list-style-type: none"> • <u>Edge controlled mode-</u> Exposure time is the period between the rising edges of the EXPOSURE1 (EXSYNC) signal. To change the exposure time, modify the active and inactive periods of the EXPOSURE1 (EXSYNC) signal in the DCF. • <u>Programmable mode-</u> Exposure time is controlled through the BASLER Configuration Tool L1x0. • <u>Level controlled mode-</u> Exposure time is during the inactive period of EXPOSURE1 (EXSYNC) signal. To change the exposure time, modify the next falling edge of the EXPOSURE1 (EXSYNC) signal in the DCF.

Application Note:


Interfacing non-standard cameras to Matrox Genesis

BASLER-MVC L101-1K


November 5, 1999

Camera Interface Details (continued)


Edge-controlled mode:
Exposure1 (EXSYNC)



Programmable mode:
Exposure1 (EXSYNC)



Level-controlled mode:
Exposure1 (EXSYNC)

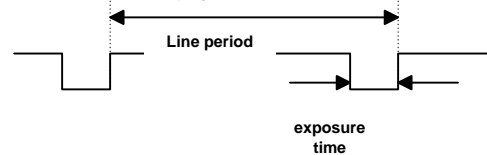


- For Edge-controlled mode and Level controlled mode, the width and deployment time of each EXPOSURE1 (EXSYNC) can be modified in the DCF using Matrox Intellicam, Genesis Native Library function **imCamControl()** or with the MIL digitizer control function **MdigControl()**. Refer to the appropriate manual or user guide for additional information
- **Maximum/Minimum exposure time:** Since the Matrox Genesis timer is 16-bit wide, the maximum exposure time is calculated to be $65536/20 \text{ MHz} = 3.27 \text{ ms}$. A minimum exposure time of **100 clock periods** or **5 ms** is recommended by the camera manufacturer for both Edge & Level-controlled modes. For Programmable mode, exposure time must be greater than **3 ms** and lower than the time between 2 rising edge of the EXPOSURE1 (EXSYNC) signals.
- **Smallest exposure time increment:** The pixel clock is the reference clock that the exposure time is being set by. The smallest increment of the exposure time is **50 ns**.

Edge-controlled and Level-controlled modes:

Exposure1 (EXSYNC)

Delay = $\leq 56 \text{ PCLK}$

HSYNC (LVAL)

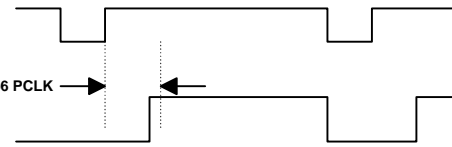


Programmable mode

Exposure1 (EXSYNC)

Programmed exposure time

HSYNC (LVAL)

Delay = $\leq 56 \text{ PCLK}$

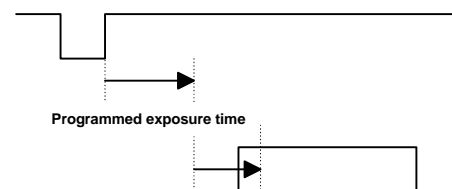

Application Note:

Interfacing non-standard cameras to Matrox Genesis

BASLER-MVC L101-1K

November 5, 1999

Cabling Requirements	Mode: Fixed line scan rate			
	<ul style="list-style-type: none"> DBHD100-TO-OPEN cable and GEN/DIG/BRD/L/_ board required for digital data, synchronization and control signals. Connections between the 44-pin HD SUB connector of the camera and the 100-pin connector of the GEN-DIG-BRD/S are as follows: 			
	BASLER L101-1K (44-pin HD SUB connector)		GEN-DIG-BRD/L/_ (100-pin connector)	
	DOUT0	01	→	DATA, INPUT, 0+ 01
	DOUT1	02	→	DATA, INPUT, 1+ 03
	DOUT2	03	→	DATA, INPUT, 2+ 05
	DOUT3	04	→	DATA, INPUT, 3+ 07
	DOUT4	05	→	DATA, INPUT, 4+ 09
	DOUT5	06	→	DATA, INPUT, 5+ 11
	DOUT6	07	→	DATA, INPUT, 6+ 13
	DOUT7	08	→	DATA, INPUT, 7+ 15
	DOUT8	09	→	DATA, INPUT, 8+ 17
	DOUT9	10	→	DATA, INPUT, 9+ 19
	DOUT10	11	→	DATA, INPUT, 10+ 21
	DOUT11	12	→	DATA, INPUT, 11+ 23
	DOUT12	13	→	DATA, INPUT, 12+ 25
	DOUT13	14	→	DATA, INPUT, 13+ 27
	DOUT14	15	→	DATA, INPUT, 14+ 29
	DOUT15	31	→	DATA, INPUT, 15+ 31
	/DOUT0	16	→	DATA, INPUT, 0- 02
	/DOUT1	17	→	DATA, INPUT, 1- 04
	/DOUT2	18	→	DATA, INPUT, 2- 06
	/DOUT3	19	→	DATA, INPUT, 3- 08
	/DOUT4	20	→	DATA, INPUT, 4- 10
	/DOUT5	21	→	DATA, INPUT, 5- 12
	/DOUT6	22	→	DATA, INPUT, 6- 14
	/DOUT7	23	→	DATA, INPUT, 7- 16
	/DOUT8	24	→	DATA, INPUT, 8- 18
	/DOUT9	25	→	DATA, INPUT, 9- 20
	/DOUT10	26	→	DATA, INPUT, 10- 22
	/DOUT11	27	→	DATA, INPUT, 11- 24
	/DOUT12	28	→	DATA, INPUT, 12- 26
	/DOUT13	29	→	DATA, INPUT, 13- 28
	/DOUT14	30	→	DATA, INPUT, 14- 30
	/DOUT15	32	→	DATA, INPUT, 15- 32
	Continued			

Application Note:

Interfacing non-standard cameras to Matrox Genesis

BASLER-MVC L101-1K

November 5, 1999

Cabling Requirements (continued)	BASLER L101-1K (44-pin HD SUB connector)			GEN-DIG-BRD/L/_ (100-pin connector)	
	LVAL	33	→	HSYNC, INPUT, +	33
	/ LVAL	34	→	HSYNC, INPUT, -	34
	PIXEL CLOCK	35	→	CLOCK, INPUT, +	39
	/ PIXEL CLOCK	36	→	CLOCK, INPUT, -	40
	EXSYNC	37	←	EXPOSURE1, OUTPUT, +	95
	/ EXSYNC	38	←	EXPOSURE1, OUTPUT, -	96
	GND	43		GROUND	37
	GND	44		GROUND	38

The DCF(s) mentioned in this application note can be found on the MIL and Native Library CD, or our FTP site ([ftp.matrox.com](ftp:matrox.com)). The information furnished by Matrox Electronics System, Ltd. is believed to be accurate and reliable. Please verify all interface connections with camera documentation or manual. Contact your local sales representative or Matrox Sales office or Imaging Applications at 514-822-6061 for assistance.

Corporate headquarters:

Canada and U.S.A.

Matrox Electronic Systems Ltd.
 1055 St. Regis Blvd.
 Dorval, Quebec H9P 2T4
 Canada
 Tel: (514) 685-2630
 Fax: (514) 822-6273

