

Matrox Genesis

Camera Interface Application Note

HITACHI KP-F110

February 14, 2002

Basics about the
camera

Camera Descriptions

- Effective resolution: $1024 \times 1024 \times 8$ or 10-bit @ 30 fps.
- Single tap analog or dual tap RS-422 digital video output.
- Progressive scan.
- Internal or external sync.
- Internal or external exposure control.
- 48.6/24.3 MHz pixel clock rate (analog/digital respectively).


Interface Modes

- Continuous

Camera Interface Briefs


Mode 1: Continuous (analog)

- $1024 \times 1024 \times 8$ -bit @ 30 fps.
- Single tap analog video.
- Progressive scan.
- Matrox Genesis receiving video signals from camera.
- DCF used: [HTKP110A.DCF](#)

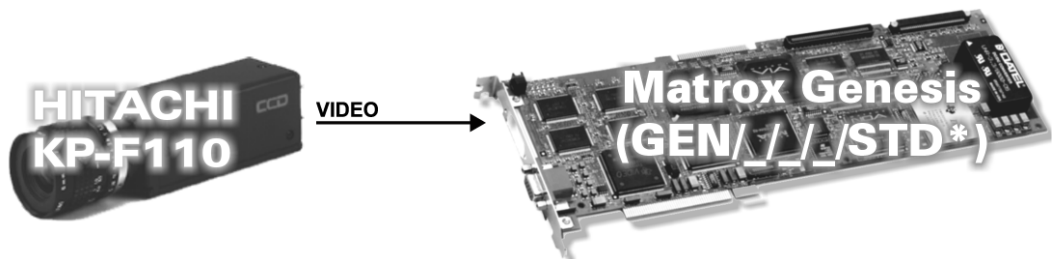

Mode 2: Continuous (digital)

- $1024 \times 1024 \times 10$ -bit @ 30 fps.
- Dual tap RS-422 digital video.
- Progressive scan.
- Matrox Genesis receiving HSYNC (HDH/L), VSYNC (VDH/L), PIXEL CLOCK (CKH/L @ 48.6 MHz) and video signals from camera.
- DCF used: [HTKP110D.DCF](#)

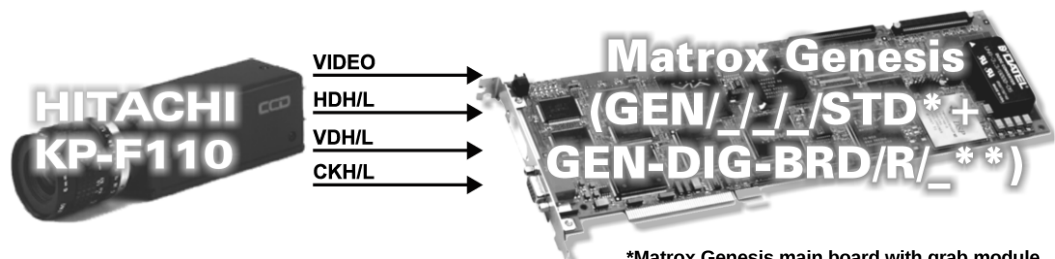

*Matrox Genesis main board with grab module
**Matrox digital RS-422 input board

Mode of operations as
per Matrox Imaging (in
parentheses as per
camera manufacturer)
Basics about the
interface modes

Matrox Genesis

Camera Interface Application Note

HITACHI KP-F110

February 14, 2002

Specifics about the
interface modes

Camera Interface Details

Mode 1 and 2: Continuous (analog/digital)

- **Frame Rate:** Matrox Genesis receives the continuous video from the camera at 30 frames per second.
- **Exposure time:** Exposure time is determined by the rear panel switch settings. Refer to the camera manual for more information.
- **Camera switch settings:** Refer to the camera manual for more information. External switch settings should be set as follows:

Switch	Setting
Frame on Demand Mode	1T
Frame on Demand (ON/OFF)	OFF
Shutter Speed	As Desired

Cabling Requirements

Mode 1: Continuous (analog)

- **Cable:** IMG-7W2-TO-5BNC cable required for video signals.
- **Connection:** Video Input (Red BNC) of the IMG-7W2-TO-5BNC cable should be connected to the VIDEO OUT BNC of the camera.

Mode 2: Continuous (digital)

- **Cable:** DBHD100-TO-OPEN (open ended) cable required for video, synchronization and control signals.
- **Connection:** Connections between the 50-pin connectors of the camera and the 100-pin connectors of the Matrox Genesis are as follows:

MATROX GENESIS
(100-pin connector)
Pin name

Pin no.

HITACHI KP-F110
(50-pin connector)
Pin name

Pin no.

DATA, INPUT, 0+	01	←	DA D0+	26
DATA, INPUT, 0-	02	←	DA D0-	27
DATA, INPUT, 1+	03	←	DA D1+	28
DATA, INPUT, 1-	04	←	DA D1-	29
DATA, INPUT, 2+	05	←	DA D2+	30
DATA, INPUT, 2-	06	←	DA D2-	31
DATA, INPUT, 3+	07	←	DA D3+	32
DATA, INPUT, 3-	08	←	DA D3-	33
DATA, INPUT, 4+	09	←	DA D4+	34
DATA, INPUT, 4-	10	←	DA D4-	35
DATA, INPUT, 5+	11	←	DA D5+	36
DATA, INPUT, 5-	12	←	DA D5-	37

Continued...

Cabling details for the
interface modes

Matrox Genesis

Camera Interface Application Note

HITACHI KP-F110

February 14, 2002

Cabling details for the
interface modes

Cabling Requirements (continued)

Mode 2: Continuous (digital)

- **Connection:** Connections between the 50-pin connectors of the camera and the 100-pin connectors of the Matrox Genesis are as follows:

MATROX GENESIS (100-pin connector)			HITACHI KP-F110 (50-pin connector)	
Pin name	Pin no.		Pin name	Pin no.
DATA, INPUT, 4+	09	←	DA D4+	34
DATA, INPUT, 4-	10	←	DA D4-	35
DATA, INPUT, 5+	11	←	DA D5+	36
DATA, INPUT, 5-	12	←	DA D5-	37
DATA, INPUT, 6+	13	←	DA D6+	38
DATA, INPUT, 6-	14	←	DA D6-	39
DATA, INPUT, 7+	15	←	DA D7+	40
DATA, INPUT, 7-	16	←	DA D7-	41
DATA, INPUT, 8+	17	←	DA D8+	42
DATA, INPUT, 8-	18	←	DA D8-	43
DATA, INPUT, 9+	19	←	DA D9+	44
DATA, INPUT, 9-	20	←	DA D9-	45
HSYNC, INPUT, +	33	←	HDH	25
HSYNC, INPUT, -	34	←	HDL	50
VSYNC, INPUT, +	35	←	VDH	48
VSYNC, INPUT, -	36	←	VDL	49
GROUND	37	--	GND	23
GROUND	38	--	GND	24
CLOCK, INPUT, - (NEG)	39	←	CLK+	46
CLOCK, INPUT, + (POS)	40	←	CLK-	47
DATA, INPUT, 16+	51	←	DB D0+	01
DATA, INPUT, 16-	52	←	DB D0-	02
DATA, INPUT, 17+	53	←	DB D1+	03
DATA, INPUT, 17-	54	←	DB D1-	04
DATA, INPUT, 18+	55	←	DB D2+	05
DATA, INPUT, 18-	56	←	DB D2-	06
DATA, INPUT, 19+	57	←	DB D3+	07
DATA, INPUT, 19-	58	←	DB D3-	08
DATA, INPUT, 20+	59	←	DB D4+	09
DATA, INPUT, 20-	60	←	DB D4-	10
DATA, INPUT, 21+	61	←	DB D5+	11
DATA, INPUT, 21-	62	←	DB D5-	12
DATA, INPUT, 22+	63	←	DB D6+	13

Continued...

Matrox Genesis

Camera Interface Application Note

HITACHI KP-F110

February 14, 2002

*Cabling details for the
interface modes*

Cabling Requirements (continued)

Mode 2: Continuous (digital)

- **Connection:** Connections between the 50-pin connectors of the camera and the 100-pin connectors of the Matrox Genesis are as follows:

MATROX GENESIS (100-pin connector)			HITACHI KP-F110 (50-pin connector)	
<i>Pin name</i>	<i>Pin no.</i>		<i>Pin name</i>	<i>Pin no.</i>
DATA, INPUT, 22-	64	←	DB D6-	14
DATA, INPUT, 23+	65	←	DB D7+	15
DATA, INPUT, 23-	66	←	DB D7-	16
DATA, INPUT, 24+	67	←	DB D8+	17
DATA, INPUT, 24-	68	←	DB D8-	18
DATA, INPUT, 25+	69	←	DB D9+	19
DATA, INPUT, 25-	70	←	DB D9-	20

The DCF(s) mentioned in this application note can be found on the MIL, Native Library CD or our FTP site ([ftp.matrox.com](ftp:matrox.com)). The information furnished by Matrox Electronics System, Ltd. is believed to be accurate and reliable. Please verify all interface connections with camera documentation or manual. Contact your local sales representative or Matrox Sales office or Matrox Imaging Applications at 514-822-6061 for assistance.

Corporate headquarters:

Canada and U.S.A.

Matrox Electronic Systems Ltd.
1055 St. Regis Blvd.
Dorval, Quebec H9P 2T4
Canada
Tel: (514) 685-2630
Fax: (514) 822-6273

