

Matrox Solios eCL/XCL-B

Camera Interface Application Note

IMPERX ICL-B1410M-SC000

January 27, 2011

Basics about the camera

Camera Descriptions

- Effective resolution: $1392 \times 1040 \times 14\text{-bit}$ @ 30 fps.
- Camera Link BASE interface (Single tap).
- Progressive scan.
- Internal sync.
- External or internal exposure control.
- 54 MHz pixel clock rate.

Mode of operations as per
Matrox Imaging (in parentheses
as per camera manufacturer)

Interface Mode


- Continuous (Free Running)
- Pseudo-continuous (Async Pulse Width)
- Asynchronous reset (Async Pulse Width)

Basics about the interface modes

Camera Interface Briefs

Mode 1: Continuous

- $1392 \times 1040 \times 14\text{-bit}$ @ 30 fps.
- Camera Link BASE interface (Single tap).
- Matrox Solios eCL/XCL-B receiving LVAL, FVAL, CLK and video from camera.
- DCF used: [ICL-B1410M-SC000_1392x1040x14bitCon.DCF](#)

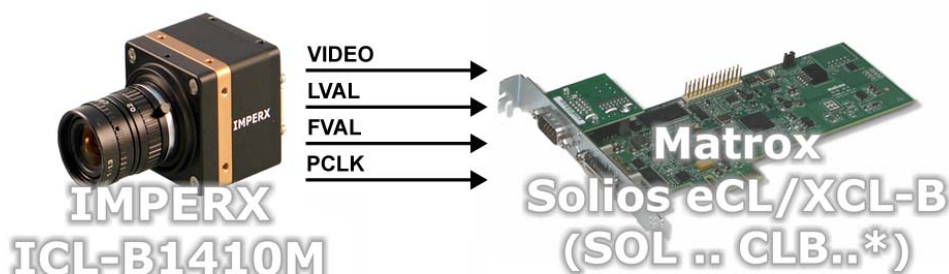

Mode 2: Pseudo-continuous

- $1392 \times 1040 \times 14\text{-bit}$.
- Camera Link BASE interface (Single tap).
- Matrox Solios eCL/XCL-B sending TIMER1 OUT (CC1) signal to camera to initiate and control the exposure time.
- Matrox Solios eCL/XCL-B receiving LVAL, FVAL, CLK and video from camera.
- DCF used: [ICL-B1410M-SC000_1392x1040x14bitPcon.DCF](#)

Matrox Solios eCL/XCL-B

Camera Interface Application Note


IMPERX ICL-B1410M-SC000

January 27, 2011

Basics about the interface modes


Camera Interface Briefs (cont.)

Mode 2: Pseudo-continuous

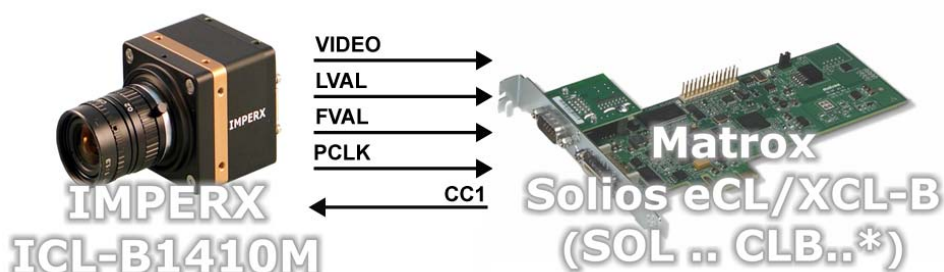

Mode 3: Asynchronous reset

- $1392 \times 1040 \times 14$ -bit.
- Camera Link BASE interface (Single tap).
- Matrox Solios eCL/XCL-B receiving external OPTO trigger signal.
- Matrox Solios eCL/XCL-B sending TIMER1 OUT (CC1) signal to camera to initiate and control the exposure.
- Matrox Solios eCL/XCL-B receiving LVAL, FVAL, CLK and video from camera.
- DCF used: [ICL-B1410M-SC000_1392x1040x14bitAsync.DCF](#)

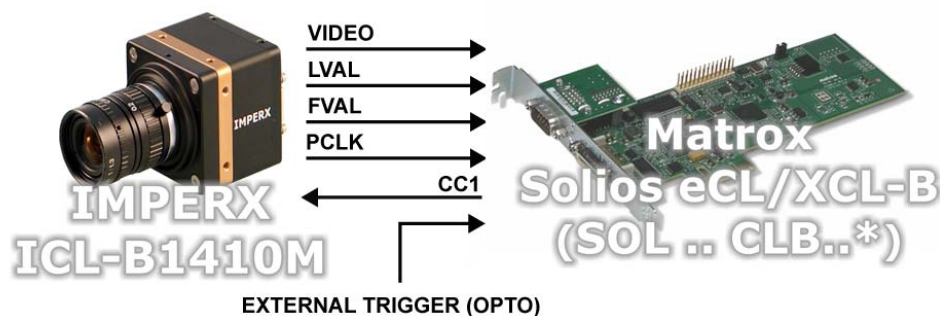

Specifics about the interface modes

Camera Interface Details

Mode 1: Continuous

- **Frame rate:** Matrox Solios eCL/XCL-B receives the continuous video from the camera at 30 frames per second.
- **Exposure time:** Exposure time is set using the Imperx Bobcat Camera Configuration Utility. Refer to the camera manual for commands description and usage.

Matrox Solios eCL/XCL-B

Camera Interface Application Note

IMPERX ICL-B1410M-SC000

January 27, 2011

Specifics about the interface modes

Camera Interface Details (cont.)

Mode 1: Continuous

- **Camera configuration:** The camera mode is set as follows using the Imperx Bobcat Camera Configuration Utility. Refer to the camera manual for commands description and usage: Taps = Single Tap | Data Format = 1 Tap Single | Speed = Fast | Bit Depth = 14-bit | Shift = Shift 0 | Trigger = OFF | AOI/AOI#1 = 1392x1040

Mode 2: Pseudo-continuous

- **Frame rate:** The frame rate is determined by the frequency of the TIMER1 OUT (CC1) signal.
- **Exposure time:** The exposure is determined by the active duration of TIMER1 OUT (CC1), which can be modified in the DCF using Matrox Intellicam or with the MIL MdigControl() function. Consult the respective manual for more information.
- **Camera configuration:** The camera mode is set as follows using the Imperx Bobcat Camera Configuration Utility. Refer to the camera manual for commands description and usage: Taps = Single Tap | Data Format = 1 Tap Single | Speed = Fast | Bit Depth = 14-bit | Shift = Shift 0 | Trigger = CC | Trigger Mode = Async | Trigger Edge = Rising | Exp/Exp Ctrl = Pulse Width | AOI/AOI#1 = 1392x1040

Mode 3: Asynchronous Reset

- **Frame rate:** The frame rate is determined by the frequency of the external trigger signal. The period between the external trigger signals must be larger than the frame readout period plus the exposure time.
- **Exposure time:** Refer to Mode 2: Pseudo-continuous.
- **Camera configuration:** Refer to Mode 2: Pseudo-continuous.

Cabling details for the interface modes

Cabling Requirements

Mode 1 and 2: Continuous and Pseudo-continuous

- **Cable and Connection:** One Mini-To-Mini PoCL Camera Link cable.

Matrox Solios eCL/XCL-B

Camera Interface Application Note

IMPERX ICL-B1410M-SC000

January 27, 2011

*Cabling details for the interface
modes*

Cabling Requirements (cont.)

Mode 3: Asynchronous Reset

- **Cable and Connection:** One Mini-To-Mini PoCL Camera Link cable.
- **External trigger:** External trigger should be connected to the external auxiliary I/O (connector 0 on Matrox Solios eCL/XCL-B bracket).

EXTERNAL AUX. I/O

(connector 0)

PIN NAME	PIN NO.		PIN NAME	PIN NO.
P0_OPTO_AUX_IN0 +	15	←	SIGNAL	--
P0_OPTO_AUX_IN0 -	09	←	GROUND	--

The DCFs mentioned in this application note are also attached (embedded) to this PDF file – use the Adobe Reader's View File Attachment to access the DCF files. The information furnished by Matrox Electronics System, Ltd. is believed to be accurate and reliable. Please verify all interface connections with camera documentation or manual. Contact your local sales representative or Matrox Sales office or Matrox Imaging Applications at 514-822-6061 for assistance. © Matrox Electronic Systems Ltd, 2011.

Matrox Electronic Systems Ltd.
1055 St. Regis Blvd.
Dorval, Quebec H9P 2T4
Canada
Tel: (514) 685-2630
Fax: (514) 822-6273