

Matrox Solios eCL/XCL

Camera Interface Application Note

REDLAKE MASD EC-11000

February 19, 2007

Basics about the
camera

Camera Descriptions

- Effective resolution: $4008 \times 2672 \times 12\text{-bit}$ @ 4.6 fps.
- Camera Link BASE interface (Single tap).
- Progressive scan.
- Internal sync.
- External or internal exposure control.
- 30 MHz pixel clock rate.

Interface Mode

- Continuous (Free run)
- Pseudo-continuous (Level controlled trigger mode)
- Asynchronous reset (Level controlled trigger mode)


Mode of operations as
per Matrox Imaging (in
parentheses as per
camera manufacturer)

Basics about the
interface modes

Camera Interface Briefs

Mode 1: Continuous

- $4008 \times 2672 \times 12\text{-bit}$ @ 4.6 fps.
- $2004 \times 1336 \times 12\text{-bit}$ @ 16 fps¹ (Binning 2x2).
- Camera Link BASE interface (Single tap).
- Progressive scan.
- Matrox Solios eCL/XCL receiving LVAL, FVAL, PCLK and video from camera.
- DCF used: [EC11000_4008x2672_12bitCon.DCF](#)
- DCF used: [EC11000_2004x1336_12bitCon.DCF](#) (Binning 2x2)

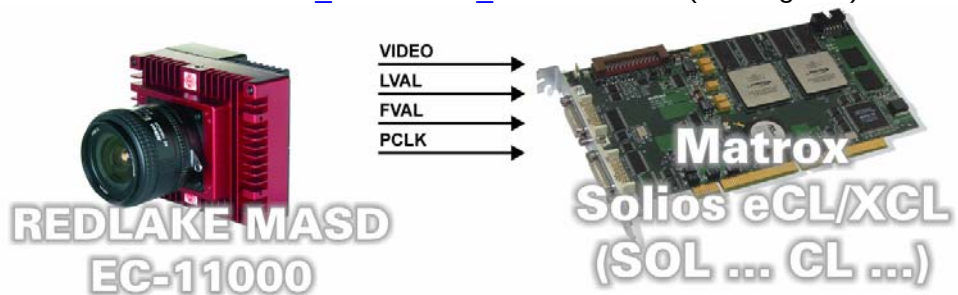

Mode 2: Pseudo-Continuous

- $4008 \times 2672 \times 12\text{-bit}$.
- Camera Link BASE interface (Single tap).
- Progressive scan.
- Matrox Solios eCL/XCL sending TIMER1 OUT (CC1) signal to camera to initiate and control the exposure.
- Matrox Solios eCL/XCL receiving LVAL, FVAL, PCLK and video from camera.
- DCF used: [EC11000_4008x2672_12bitPcon.DCF](#)

Continued...

1. This frame rate is theoretical and was not actually measured by Matrox Imaging.

Matrox Solios eCL/XCL

Camera Interface Application Note


REDLAKE MASD EC-11000

February 19, 2007

Basics about the
interface modes


Camera Interface Briefs (cont.)

Mode 2: Pseudo-Continuous

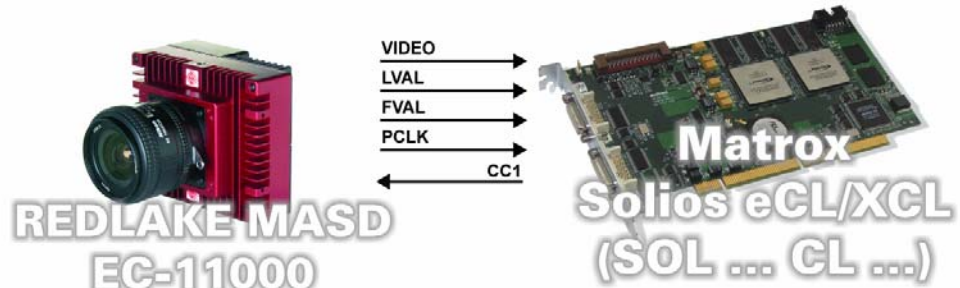

Mode 3: Asynchronous reset

- 4008 × 2672 × 12-bit.
- Camera Link BASE interface (Single tap).
- Progressive scan.
- Matrox Solios eCL/XCL receiving external trigger signal.
- Matrox Solios eCL/XCL sending TIMER1 OUT (CC1) signal to camera to initiate and control the exposure.
- Matrox Solios eCL/XCL receiving LVAL, FVAL, PCLK and video from camera.
- DCF used: [EC11000_4008x2672_12bitAsync.DCF](#)

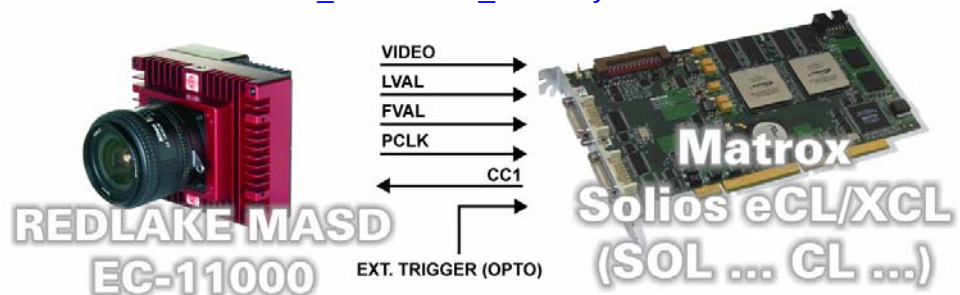

Specifics about
the interface modes

Camera Interface Details

Mode 1: Continuous

- **Frame Rate:** Matrox Solios eCL/XCL receives the continuous video from the camera at 4.6 fps for regular mode or 16 fps¹ for Binning 2x2 mode.
- **Exposure time:** Exposure time is set using the shutter speed setting in the Camera Configuration Utility. Refer to the camera manual for more information.

Continued...

1. This frame rate is theoretical and was not actually measured by Matrox Imaging.

Matrox Solios eCL/XCL

Camera Interface Application Note

REDLAKE MASD EC-11000

February 19, 2007

*Specifics about
the interface modes*

Camera Interface Details (cont.)

Mode 1: Continuous

- **Camera control settings:** Using the MegaPlus II Central software, set the camera controls as follows:

Control	Setting
Output Data / Bit Depth	12 Bits
Mode selection	Trigger off – Free run

*Specifics about the
interface modes*

Mode 2: Pseudo-Continuous

- **Frame rate:** The frame rate is determined by the frequency of the TIMER1 OUT (CC1) signal.
- **Exposure time:** The width (falling to rising edge) of the TIMER1 OUT (CC1) signal is the exposure time, which can be modified in the DCF using Matrox Intellicam or with the MIL MdigControl() function. Consult the respective manual for more information.
- **Camera control settings:** Using the MegaPlus II Central software via the COM port, set the camera controls as follows:

Control	Setting
Output Data / Bit Depth	12 Bits
Mode selection	Level controlled trigger mode
Polarity	Negative

Mode 3: Asynchronous Reset

- **Frame rate:** The frame rate is determined by the frequency of the external trigger signal.
- **Exposure time:** Refer to Mode 2: Pseudo-Continuous.
- **Camera Configuration:** Refer to Mode 2: Pseudo-Continuous.

*Cabling details for the
interface modes*

Cabling Requirements

Modes 1 and 2: Continuous, Pseudo-continuous

- **Cable and Connection:** Standard Camera Link.

Matrox Solios eCL/XCL

Camera Interface Application Note

REDLAKE MASD EC-11000

February 19, 2007

*Cabling details for the
interface modes*

Cabling Requirements (cont.)

Mode 3: Asynchronous reset

- **Cable and Connection:** Standard Camera Link.
- **External trigger:** External trigger should be connected to the OPTO TRIG input of the 9-pin connector (pins 7 and 2) on the Expanded I/O adapter bracket.

EXPANDED I/O BRACKET (9-pin connector)

				External Trigger Source	
OPTOTRIG +	07	←	LINE SIGNAL	--	
OPTOTRIG -	02	←	LINE GROUND	--	

The DCFs mentioned in this application note are also attached (embedded) to this PDF file – use the Adobe Reader's View File Attachment to access the DCF files. The information furnished by Matrox Electronics System, Ltd. is believed to be accurate and reliable. Please verify all interface connections with camera documentation or manual. Contact your local sales representative or Matrox Sales office or Matrox Imaging Applications at 514-822-6061 for assistance. © Matrox Electronic Systems Ltd, 2007-2011.

Matrox Electronic Systems Ltd.

1055 St. Regis Blvd.
Dorval, Quebec H9P 2T4
Canada
Tel: (514) 685-2630
Fax: (514) 822-6273

SOL-CID-051

