

# Matrox Solios eCL/XCL

## Camera Interface Application Note

Sentech STC-CLC152A

March 16, 2011

### Basics about the camera

### Camera Descriptions

- Effective resolution:  $1360 \times 1040 \times 10\text{-bit}$  @ 20 fps.
- Camera Link BASE interface (Single tap).
- Progressive scan, Bayer color filter.
- Internal sync.
- Internal or external exposure control.
- 28.6363 MHz pixel clock rate.

### Mode of operations as per Matrox Imaging (in parentheses as per camera manufacturer)

### Interface Mode


- Continuous (Continuous Mode)
- Pseudo-continuous (Pulse Width Trigger Mode)
- Asynchronous reset (Pulse Width Trigger Mode)

### Basics about the interface modes

### Camera Interface Briefs

#### Mode 1: Continuous

- $1360 \times 1040 \times 10\text{-bit}$  @ 20 fps.
- Camera Link BASE interface (Single tap).
- Matrox Solios eCL/XCL receiving LVAL, FVAL, PIXEL CLOCK (CLK @ 28.6363 MHz) and video from camera.
- DCF used: [STCCLC152A\\_1360x1040\\_10bitCon.DCF](#)

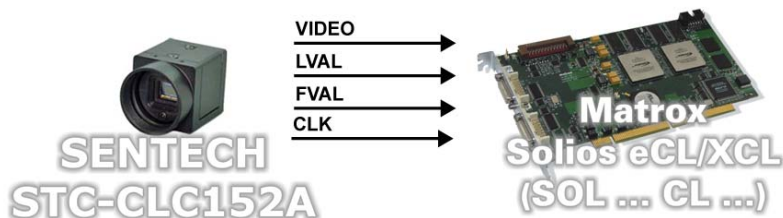

#### Mode 2: Pseudo-continuous

- $1360 \times 1040 \times 10\text{-bit}$ .
- Camera Link BASE interface (Single tap).
- Matrox Solios eCL/XCL sending TIMER 1 OUT (CC1) signal to camera to initiate and control the exposure.
- Matrox Solios eCL/XCL receiving LVAL, FVAL, PIXEL CLOCK (CLK @ 28.6363 MHz) and video from camera.
- DCF used: [STCCLC152A\\_1360x1040\\_10bitPcon.DCF](#)

# Matrox Solios eCL/XCL

## Camera Interface Application Note


Sentech STC-CLC152A

March 16, 2011

Basics about the interface modes


### Camera Interface Briefs (cont.)

#### Mode 2: Pseudo-continuous

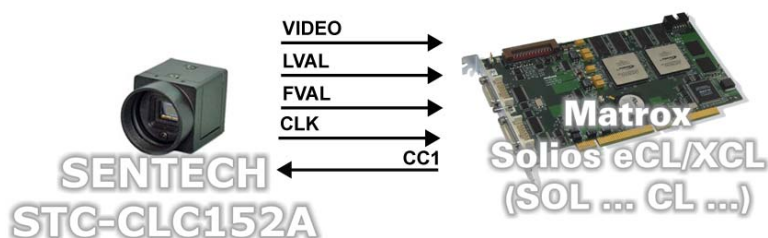

#### Mode 3: Asynchronous reset

- 1360 × 1040 × 10-bit.
- Camera Link BASE interface (Single tap).
- Matrox Solios eCL/XCL receiving external trigger signal.
- Matrox Solios eCL/XCL sending TIMER 1 OUT (CC1) signal to camera to initiate and control the exposure.
- Matrox Solios eCL/XCL receiving LVAL, FVAL, PIXEL CLOCK (CLK @ 28.6363 MHz) and video from camera.
- DCF used: [STCCLC152A\\_1360x1040\\_10bitAsync.DCF](#)

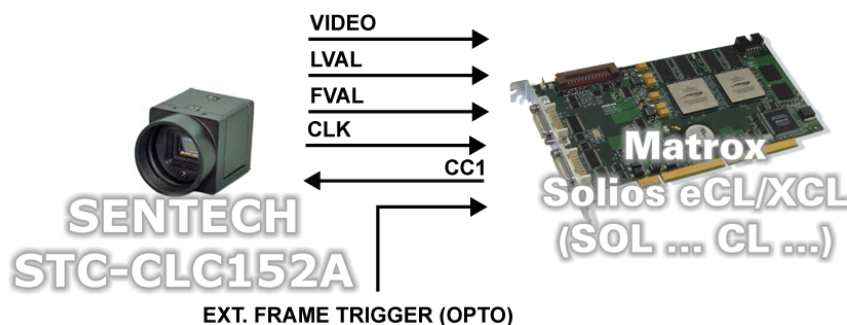

Specifics about the interface modes

### Camera Interface Details

#### Mode 1: Continuous

- **Frame rate:** Matrox Solios eCL/XCL receives the continuous video from the camera at 20 frames per second.
- **Exposure time:** Exposure time is set using the integration time setting in the Camera Configuration utility. Refer to the camera manual for more information.

# Matrox Solios eCL/XCL

## Camera Interface Application Note

Sentech STC-CLC152A

March 16, 2011

*Specifics about the interface modes*

### Camera Interface Details (cont.)

#### *Mode 1: Continuous*

- **Bayer color filter:** Color information is generated by a Bayer color mosaic filter mounted on the sensor. Refer to the MIL online Help for information on using buffers with the Bayer color filter.
- **Camera control settings:** Set the camera using the Sentech SOF-Cube Camera Configuration Utility as follows: Trigger Mode = Normal | Output Mode = 10-bit

#### *Mode 2: Pseudo-continuous*

- **Frame rate:** The frame rate is determined by the frequency of the TIMER1 OUT (CC1) signal.
- **Exposure time:** The TIMER1 OUT (CC1) signal's active duration initiates and controls the exposure time, which can be modified in the DCF using Matrox Intellicam or with the MIL MdigControl() function. Consult the respective manual for more information.
- **Bayer color filter:** Refer to Mode 1: Continuous.
- **Camera control settings:** Set the camera using the Sentech SOF-Cube Camera Configuration Utility as follows: Trigger Mode = Pulse Width Trigger | Output Mode = 10-bit | Trigger Reset Mode = V-Reset

#### *Mode 3: Asynchronous Reset*

- **Frame rate:** The frame rate is determined by the frequency of the external trigger signal. The period between the external trigger signals must be larger than the frame readout period plus the exposure time.
- **Exposure time:** Refer to Mode 2: Pseudo-continuous.
- **Bayer color filter:** Refer to Mode 1: Continuous.
- **Camera settings:** Refer to Mode 2: Pseudo-continuous.

*Cabling details for the interface modes*

### Cabling Requirements

#### *Mode 1 and 2: Continuous and Pseudo-continuous*

- **Cable and Connection:** One Standard-To-Mini Camera Link cable.

# Matrox Solios eCL/XCL

## Camera Interface Application Note

Sentech STC-CLC152A

March 24, 2011

Cabling details for the interface  
modes

### Cabling Requirements (cont.)

#### Mode 3: Asynchronous Reset

- **Cable and Connection:** One Standard-To-Mini Camera Link cable.
- **External trigger:** External trigger should be connected to the external auxiliary I/O (connector 1 on cable adapter bracket).

#### EXTERNAL AUX. I/O

##### (connector 1)

| PIN NAME          |  | PIN NO. | External Trigger Source |         |
|-------------------|--|---------|-------------------------|---------|
|                   |  |         | PIN NAME                | PIN NO. |
| PO_OPTO_AUX_IN0 + |  | 07 ←    | SIGNAL                  | --      |
| PO_OPTO_AUX_IN0 - |  | 02 ←    | GROUND                  | --      |

The DCFs mentioned in this application note are also attached (embedded) to this PDF file – use the Adobe Reader's View File Attachment to access the DCF files. The information furnished by Matrox Electronics System, Ltd. is believed to be accurate and reliable. Please verify all interface connections with camera documentation or manual. Contact your local sales representative or Matrox Sales office or Matrox Imaging Applications at 514-822-6061 for assistance. © Matrox Electronic Systems Ltd, 2010-2011.

**Matrox Electronic Systems Ltd.**  
1055 St. Regis Blvd.  
Dorval, Quebec H9P 2T4  
Canada  
Tel: (514) 685-2630  
Fax: (514) 822-6273