

Matrox Odyssey Xpro

Camera Interface Application Note

SENTECH STC-A83A

June 2, 2009

Basics about the camera

Camera Descriptions

- Effective resolution: $1024 \times 768 \times 8\text{-bit}$ @ 29 fps.
- Analog monochrome video output.
- Progressive scan.
- Internal or external sync.
- Internal or external exposure control.
- 29.5 MHz pixel clock rate.


Interface Mode

- Continuous
- Pseudo- continuous (Pulse Width Trigger with V-Reset)
- Asynchronous reset (Pulse Width Trigger with V-Reset)

Camera Interface Briefs

Mode 1: Continuous

- $1024 \times 768 \times 8\text{-bit}$ @ 29 fps.
- Analog monochrome video.
- Matrox Odyssey Xpro receiving Sync and video signals from camera.
- DCF used: [STCA83A_1024x768Con.DCF](#)

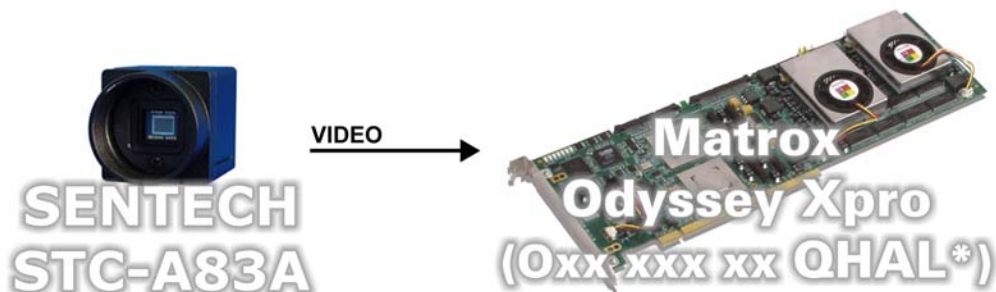

Mode 2: Pseudo-continuous

- Up to $1024 \times 768 \times 8\text{-bit}$.
- Analog monochrome video
- Matrox Odyssey Xpro sending EXPOSURE1 (TRIG IN) signal to camera to initiate and control the exposure.
- Matrox Odyssey Xpro receiving Sync and video signals from camera.
- DCF used: [STCA83A_1024x768Pcon.DCF](#)

Continued...

*Matrox Odyssey Xpro main board with analog frame grabber module

Matrox Odyssey Xpro

Camera Interface Application Note


SENTECH STC-A83A

June 2, 2009

Basics about the
interface modes

Camera Interface Briefs


Mode 2: Pseudo-continuous

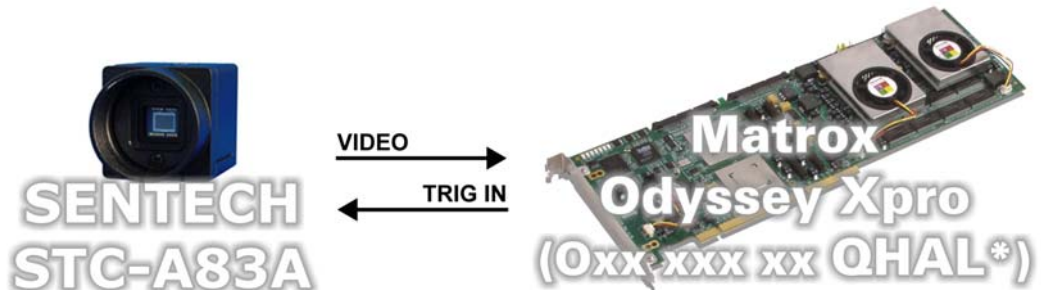

*Matrox Odyssey Xpro main board
with analog frame grabber module

Mode 3: Asynchronous reset

- Up to $1024 \times 768 \times 8$ -bit.
- Analog monochrome video
- Matrox Odyssey Xpro receiving external trigger signal.
- Matrox Odyssey Xpro sending EXPOSURE1 (TRIG IN) signal to camera to initiate and control the exposure.
- Matrox Odyssey Xpro receiving Sync and video signals from camera.
- DCF used: [STCA83A_1024x768Async.DCF](#)

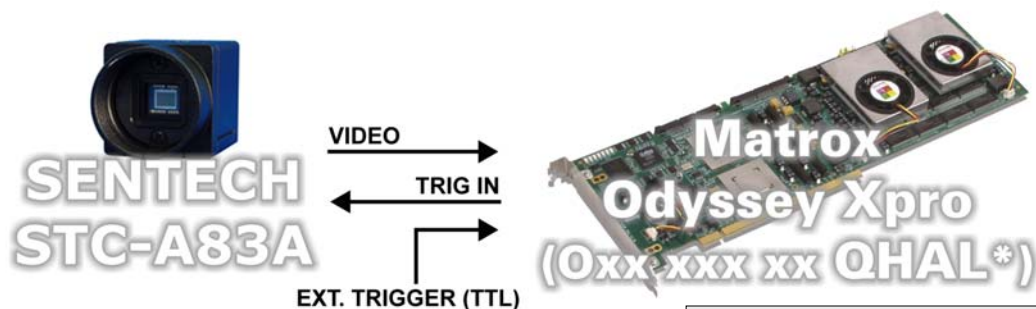

*Matrox Odyssey Xpro main board
with analog frame grabber module

Specifics about the
interface modes

Camera Interface Details

Mode 1: Continuous

- **Frame rate:** Matrox Odyssey Xpro receives the continuous video from the camera at 29 frames per second.
- **Exposure time:** Exposure time is inversely proportionate to the frame rate (no shutter) or determined by the shutter setting. Refer to the camera manual for more information.

Matrox Odyssey Xpro

Camera Interface Application Note

SENTECH STC-A83A

June 2, 2009

Specifics about the
interface modes

Camera Interface Details (cont.)

Mode 1: Continuous

- **Camera switch settings:** Refer to the camera manual for additional information. External and internal switches for this mode should be set as follows:

External DIP Switch settings									
1	2	3	4	5	6	7	8	9	10
OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
Internal Sync. Mode Switch: Set to INTERNAL									

Mode 2: Pseudo-continuous

- **Frame rate:** The Frame Rate is determined by the frequency of Timer1. The maximum possible frame rate is dependent on the exposure time as well as the camera's frame readout period.
- **Exposure time:** The width (active duration) of the EXPOSURE1 (TRIG IN) signal is the exposure time, which can be modified in the DCF using Matrox Intellicam or with the MIL MdigControl() function. Consult the respective manual for more information.
- **Camera settings:** Refer to the camera manual for additional information. Switches for this mode should be set as follows:

External DIP Switch settings									
1	2	3	4	5	6	7	8	9	10
OFF	OFF	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF
Internal Sync. Mode Switch: Set to EXTERNAL									

Mode 3: Asynchronous Reset

- **Frame rate:** The frame rate is determined by the frequency of the external trigger signal. The maximum possible frame rate is dependent on the exposure time as well as the camera's frame readout period.
- **Exposure time:** The width (active duration) of the EXPOSURE1 (TRIG IN) signal is the exposure time, which can be modified in the DCF using Matrox Intellicam or with the MIL MdigControl() function. Consult the respective manual for more information.
- **Camera settings:** Refer to *Mode 2: Pseudo-continuous*.

Matrox Odyssey Xpro

Camera Interface Application Note

SENTECH STC-A83A

June 2, 2009


Cabling details for the
interface modes

Cabling Requirements

Mode 1: Continuous

- **Cable and Connection:** DVI-TO-8BNC/O (open ended) cable required for video and synchronization signals. The connections between the camera's 12-pin connector and the DVI connector of the Matrox Odyssey Xpro are as follows:


Matrox Odyssey (DVI analog input connector-0)		SENTECH STC-A33A (12-pin connector)	
Pin name	Pin no.	Pin name	Pin no.
CH0_INPUTA	C1	VIDEO	04
GROUND	C5	VIDEO OUT GROUND	03



Mode 2: Pseudo-continuous

- **Cable and Connection:** DVI-TO-8BNC/O (open ended) cable required for video and synchronization signals. The connections between the camera's 12-pin connector and the DVI connector of the Matrox Odyssey Xpro are as follows:


Matrox Odyssey (DVI analog input connector-0)		SENTECH STC-A33A (12-pin connector)	
Pin name	Pin no.	Pin name	Pin no.
CH0_INPUTA	C1	VIDEO	04
GROUND	C5	VIDEO OUT GROUND	03
P0_TTL_AUX (EXP_OUT)	23	TRIG IN	11
GROUND	11	TRIG IN GROUND	12



Mode 3: Asynchronous reset

- **Cable and Connection:** DVI-TO-8BNC/O (open end) cable required for video signal. The connection between the 12-pin connector of the camera and the Matrox Odyssey are as follow:

Matrox Odyssey (DVI analog input connector-0)		SENTECH STC-A33A (12-pin connector)	
Pin name	Pin no.	Pin name	Pin no.
CH0_INPUTA	C1	VIDEO	04
GROUND	C5	VIDEO OUT GROUND	03
P0_TTL_AUX (EXP_OUT)	23	TRIG IN	11
GROUND	11	TRIG IN GROUND	12



Matrox Odyssey Xpro

Camera Interface Application Note

SENTECH STC-A83A

June 2, 2009

*Cabling details for the
interface modes*

Cabling Requirements (cont.)

Mode 3: Asynchronous reset

- **External trigger:** External trigger should be connected to the OPTO TRIG input of the 9-pin connector (pins 7 and 2) on the external trigger input connector 1 (cable adapter board).

External trigger input

(9-pin connector)

External Trigger Source

OPTO TRIG+	07	←	SIGNAL	--
OPTO TRIG-	02	←	GROUND	--

The DCFs mentioned in this application note are also attached (embedded) to this PDF file – use the Adobe Reader's View File Attachment to access the DCF files. The information furnished by Matrox Electronics System, Ltd. is believed to be accurate and reliable. Please verify all interface connections with camera documentation or manual. Contact your local sales representative or Matrox Sales office or Matrox Imaging Applications at 514-822-6061 for assistance. © Matrox Electronic Systems Ltd, 2009-2011.

Matrox Electronic Systems Ltd.

1055 St. Regis Blvd.
Dorval, Quebec H9P 2T4
Canada
Tel: (514) 685-2630
Fax: (514) 822-6273
ODY-CID-290

