

MATROX GENESIS

CAMERA INTERFACE APPLICATION NOTE

REDLAKE MASD (KODAK) 6.3i

JUNE 19, 2001

Basics about the
camera

Mode of operations as
per Matrox Imaging (in
parentheses as per
camera manufacturer)

Basics about the
interface modes

Camera Descriptions

- $3070 \times 2048 \times 8/10$ -bit @ up to 2 fps (maximum).
- Single or dual channel RS-422 digital video output.
- Progressive scan.
- External sync.
- Internal or external exposure control.
- 10 MHz pixel clock rate.


Interface Modes

- Pseudo-continuous
- Asynchronous reset (Trigger, Control)

Camera Interface Briefs

Mode 1: Pseudo-continuous

- $3066 \times 2048 \times 8/10$ -bit @ up to 2 fps.
- Dual channel RS-422 digital video.
- Progressive scan.
- Matrox Genesis receiving HSYNC (LINE ENABLE), VSYNC (FRAME ENABLE), PIXEL CLOCK (PIX DATA STRB @ 10 MHz) and video signals from camera.
- DCF used: [KOD63D.DCF](#) (8-bit)
- DCF used: [K6310D.DCF](#) (10-bit)

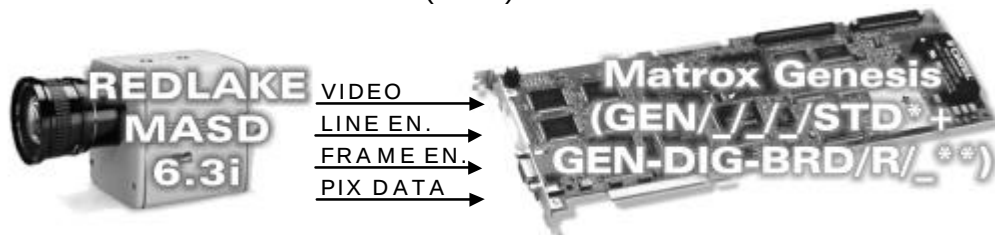

Mode 2: Asynchronous Reset (Trigger, Control)

- $3066 \times 2048 \times 8/10$ -bit.
- Dual channel RS-422 digital video.
- Progressive scan.
- Matrox Genesis receiving external trigger signal.
- Matrox Genesis sending EXPOSURE1 (EXPOSE) signal to camera to initiate and control exposure time.
- Matrox Genesis receiving HSYNC (LINE ENABLE), VSYNC (FRAME ENABLE), PIXEL CLOCK (PIX DATA STRB @ 10 MHz) and video signals from camera.

Continued...

*Matrox Genesis main board with grab module
**MatroxRS-422 digital data input board

MATROX GENESIS

CAMERA INTERFACE APPLICATION NOTE

REDLAKE MASD (KODAK) 6.3i


JUNE 19, 2001

Basics about the
interface modes

Camera Interface Briefs (Cont.)

Mode 2: Asynchronous Reset (Trigger, Control)

- DCF used: [KOD63DA.DCF](#) (Trigger, 8-bit)
- DCF used: [K6310DA.DCF](#) (Trigger, 10-bit)
- DCF used: [KOD63DAE.DCF](#) (Control, 8-bit)
- DCF used: [K6310DAE.DCF](#) (Control, 10-bit)

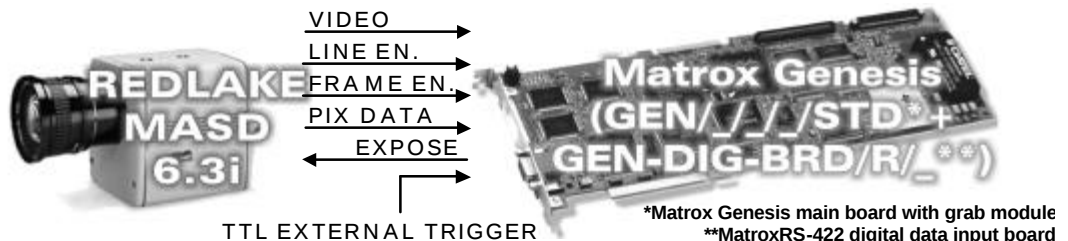

Specifics about the
interface modes

Camera Interface Details

Mode 1: Pseudo-continuous

- **Frame Rate:** Matrox Genesis receives the continuous video from the camera at 2 frames per second.
- **Exposure time:** Exposure time is inversely proportionate to the frame rate (no shutter) or determined by the shutter setting (remote panel software). Refer to the camera manual for more information.
- **Remote Panel software settings:** Operating mode set to **Continuous**. Refer to the camera manual for additional information.

Mode 2: Asynchronous Reset (Trigger)

- **Frame rate:** The frame rate is determined by the frequency of the external trigger signal.
- **Exposure time:** The rising edge of the EXPOSURE1 (EXPOSE) signal initiates the exposure; exposure period is controlled through the Remote Panel software. Refer to the camera manual for more information.
- **Remote Panel software settings:** Operating mode set to **Trigger**. Refer to the camera manual for additional information.

Mode 2: Asynchronous Reset (Control)

- **Frame rate:** The frame rate is determined by the frequency of the external trigger signal.
- **Exposure time:** The width (rising to falling edge) of the EXPOSURE1 (EXPOSE) signal initiates and controls the exposure. The exposure time can be modified in the DCF using Matrox Intellicam, Genesis Native Library (GNL) `imCamControl()` or with the MIL `MdigControl()` function. Consult the respective manual for more information.
- **Remote Panel software settings:** Operating mode set to **Control**. Refer to the camera manual for additional information.

MATROX GENESIS

CAMERA INTERFACE APPLICATION NOTE

REDLAKE MASD (KODAK) 6.3i

JUNE 19, 2001

Cabling details for this interface mode

Cabling Requirements

Mode 1: Pseudo-continuous (8-bit)

- **Cable:** DBHD100-TO-OPEN (open ended) cable required for video, synchronization and control signals.
- **Connection:** Connections between the 68-pin connector of the camera and the 100-pin connectors of the Matrox Genesis are as follows:

GEN-DIG-BRD/R/_ (100-pin connector)			REDLAKE MASD 6.3i (68-pin connector)	
Pin name	Pin no.		Pin name	Pin no.
DATA, INPUT, 7+	15	←	MSB+	02
DATA, INPUT, 7-	16	←	MSB-	36
DATA, INPUT, 6+	13	←	MSB-1+	03
DATA, INPUT, 6-	14	←	MSB-1-	37
DATA, INPUT, 5+	11	←	MSB-2+	04
DATA, INPUT, 5-	12	←	MSB-2-	38
DATA, INPUT, 4+	09	←	MSB-3+	05
DATA, INPUT, 4-	10	←	MSB-3-	39
DATA, INPUT, 3+	07	←	MSB-4+	06
DATA, INPUT, 3-	08	←	MSB-4-	40
DATA, INPUT, 2+	05	←	MSB-5+	07
DATA, INPUT, 2-	06	←	MSB-5-	41
DATA, INPUT, 1+	03	←	MSB-6+	08
DATA, INPUT, 1-	04	←	MSB-6-	42
DATA, INPUT, 0+	01	←	MSB-7+	09
DATA, INPUT, 0-	02	←	MSB-7-	43
CLOCK, INPUT, +	39	←	PIX DATA STRB +	29
CLOCK, INPUT, -	40	←	PIX DATA STRB -	63
HSYNC, INPUT, +	33	←	LINE ENA +	26
HSYNC, INPUT, -	34	←	LINE ENA -	60
VSYNC, INPUT, +	35	←	FRME ENA +	25
VSYNC, INPUT, -	36	←	FRME ENA -	59
EXPOSURE1, OUTPUT, +	95*	→	EXPOSE +	30*
EXPOSURE1, OUTPUT, -	96*	→	EXPOSE -	64*
GROUND	50	--	GROUND	01

* Connection not necessary for this mode however allows this cable to be used for both modes.

MATROX GENESIS

CAMERA INTERFACE APPLICATION NOTE

REDLAKE MASD (KODAK) 6.3i

JUNE 19, 2001

Cabling details for this interface mode

Cabling Requirements

Mode 1: Pseudo-continuous (10-bit)

- **Cable:** DBHD100-TO-OPEN (open ended) cable required for video, synchronization and control signals.
- **Connection:** Connections between the 68-pin connector of the camera and the 100-pin connectors of the Matrox Genesis are as follows:

GEN-DIG-BRD/R/_ (100-pin connector)		REDLAKE MASD 6.3i (68-pin connector)	
Pin name	Pin no.	Pin name	Pin no.
DATA, INPUT, 9+	19	←	MSB+ 02
DATA, INPUT, 9-	20	←	MSB- 36
DATA, INPUT, 8+	17	←	MSB-1+ 03
DATA, INPUT, 8-	18	←	MSB-1- 37
DATA, INPUT, 7+	15	←	MSB-2+ 04
DATA, INPUT, 7-	16	←	MSB-2- 38
DATA, INPUT, 6+	13	←	MSB-3+ 05
DATA, INPUT, 6-	14	←	MSB-3- 39
DATA, INPUT, 5+	11	←	MSB-4+ 06
DATA, INPUT, 5-	12	←	MSB-4- 40
DATA, INPUT, 4+	09	←	MSB-5+ 07
DATA, INPUT, 4-	10	←	MSB-5- 41
DATA, INPUT, 3+	07	←	MSB-6+ 08
DATA, INPUT, 3-	08	←	MSB-6- 42
DATA, INPUT, 2+	05	←	MSB-7+ 09
DATA, INPUT, 2-	06	←	MSB-7- 43
DATA, INPUT, 1+	03	←	MSB-8+ 10
DATA, INPUT, 1-	04	←	MSB-8- 44
DATA, INPUT, 0+	01	←	MSB-9+ 11
DATA, INPUT, 0-	02	←	MSB-9- 45
CLOCK, INPUT, +	39	←	PIX DATA STRB + 29
CLOCK, INPUT, -	40	←	PIX DATA STRB - 63
HSYNC, INPUT, +	33	←	LINE ENA + 26
HSYNC, INPUT, -	34	←	LINE ENA - 60
VSYNC, INPUT, +	35	←	FRME ENA + 25
VSYNC, INPUT, -	36	←	FRME ENA - 59
EXPOSURE1, OUTPUT, +	95*	→	EXPOSE + 30*
EXPOSURE1, OUTPUT, -	96*	→	EXPOSE - 64*
GROUND	50	--	GROUND 01

* Connection not necessary for this mode however allows this cable to be used for both modes.

MATROX GENESIS

CAMERA INTERFACE APPLICATION NOTE

REDLAKE MASD (KODAK) 6.3i

JUNE 19, 2001

Cabling details for the
interface modes

Cabling Requirements (Continued)

Mode 2: Asynchronous Reset (Trigger, Control)

- **Cable:** IMG-7W2-TO-5BNC and DBHD100-TO-OPEN (open ended) cables required for video, synchronization and control signals.
- **External Trigger:** TTL external trigger source should be connected to the TTL trigger input of IMG-7W2-TO-5BNC cable.
- **Connection:** All connections are as in Mode 1: *Pseudo-continuous*.
- An RS-422 external trigger input may also be used once the following connections between the 100-pin connector of the GEN-DIG-BRD/R/_ and the external trigger source are made:

GEN-DIG-BRD/R/_
(100-pin connector)

EXTERNAL TRIGGER SOURCE

Pin name	Pin no.		Pin name	Pin no.
TRIGGER, +	47	←	RS-422 TRIGGER +	--
TRIGGER, -	48	←	RS-422 TRIGGER -	--

The DCF(s) mentioned in this application note can be found on the MIL and Native Library CD, or our FTP site ([ftp.matrox.com](ftp:ftp.matrox.com)). The information furnished by Matrox Electronics System, Ltd. is believed to be accurate and reliable. Please verify all interface connections with camera documentation or manual. Contact your local sales representative or Matrox Sales office or Matrox Imaging Applications at 514-822-6061 for assistance.

Corporate headquarters:

Canada and U.S.A.

Matrox Electronic Systems Ltd.
1055 St. Regis Blvd.
Dorval, Quebec H9P 2T4
Canada
Tel: (514) 685-2630
Fax: (514) 822-6273

