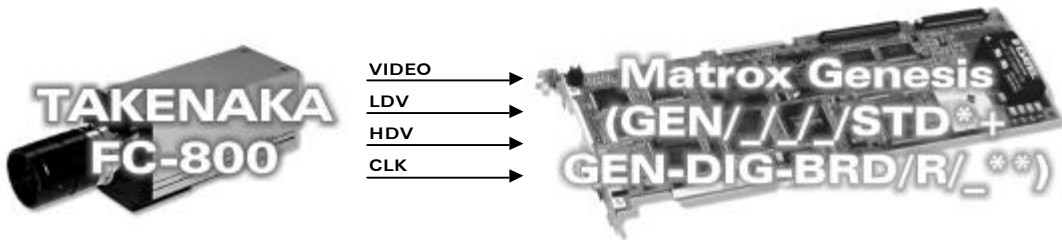
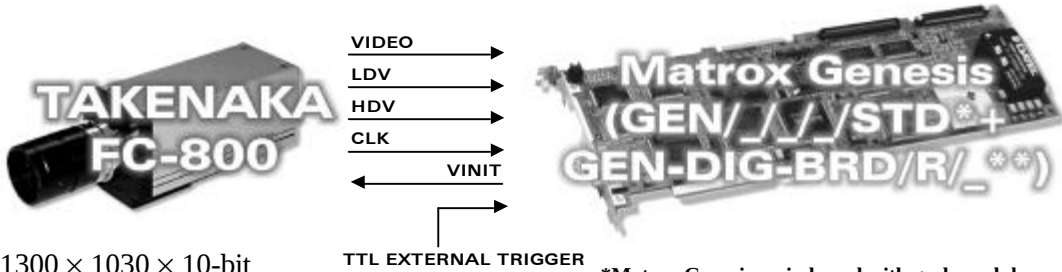


Application Note:

Interfacing non-standard cameras to Matrox Genesis

TAKENAKA FC-800

March 28, 2000

Camera Descriptions	• $1034 \times 779 \times 10$-bit @ 15 fps • Single tap analog or RS-422 digital video output. • Progressive scan • External sync. • Internal or external exposure control. • Pixel clock: 14.318 MHz
Interface modes	• Continuous, asynchronous reset
Camera Interface Briefs	Mode 1: Continuous  • $1024 \times 779 \times 10$-bit @ 15 fps • Single tap RS-422 digital video output. • Progressive scan • Continuous video. • Matrox Genesis receiving HSYNC (LDV), VSYNC (FDV), PIXEL CLOCK (CLK @ 14.318 MHz) and video signal from camera. • DCF used: GFC800C.DCF Mode 2: Asynchronous reset  • $1300 \times 1030 \times 10$-bit • Single tap RS-422 digital video output. • Progressive scan • Matrox Genesis receiving TTL external trigger. • Matrox Genesis sending EXPOSURE1 (VINIT) signal to camera; the EXPOSURE1 (VINIT) signal initiate exposure. • Matrox Genesis receiving HSYNC (LDV), VSYNC (FDV), PIXEL CLOCK (CLK @ 14.318 MHz) and video signal from camera. • DCF used: GFC800A.DCF *Matrox Genesis main board with grab module **Matrox RS-422 digital data input board

Application Note:

Interfacing non-standard cameras to Matrox Genesis

TAKENAKA FC-800

March 28, 2000

Camera Interface Details	Mode 1: Continuous • Frame rate: Matrox Genesis receives the continuous video from the camera at 15 frames per second. • Exposure time: Exposure time is inversely proportionate to the frame rate (no shutter) or determined by the shutter setting. Refer to the camera manual for more information. • Camera switch settings: External switch settings are as follows: <table><tr><th>Switch</th><th>Setting</th></tr><tr><td>Shutter</td><td>0</td></tr><tr><td>Mode</td><td>5</td></tr><tr><td>Up/Down</td><td>UP</td></tr></table> Mode 2: Asynchronous Reset • Once it has received the external trigger signal, Matrox Genesis sends the EXPOSURE1 (VINIT) signal to the camera to initiate and control the exposure period. • Frame rate: The frame rate is determined by the frequency of the external trigger signal. • Exposure time: Exposure time is dependent on the shutter switch setting as well as the width of the EXPOSURE1 (VINIT) signal (active and inactive periods). The default exposure time for this DCF is equal to 200 ms. In order to change the width and deployment time of EXPOSURE1 (VINIT) use the Exposure Settings menu tab in Matrox Intellicam. Consult the Matrox Intellicam User Guide for more information. • Camera switch settings: External switch settings are as follows: <table><tr><th>Switch</th><th>Setting</th></tr><tr><td>Shutter</td><td>0</td></tr><tr><td>Mode</td><td>5</td></tr><tr><td>Up/Down</td><td>DOWN</td></tr></table>	Switch	Setting	Shutter	0	Mode	5	Up/Down	UP	Switch	Setting	Shutter	0	Mode	5	Up/Down	DOWN																																		
Switch	Setting																																																		
Shutter	0																																																		
Mode	5																																																		
Up/Down	UP																																																		
Switch	Setting																																																		
Shutter	0																																																		
Mode	5																																																		
Up/Down	DOWN																																																		
Cabling Requirements	Mode 1: Continuous • DBHD100-TO-OPEN cable and GEN/DIG/BRD/R/_ board required for digital data, synchronization and control signals. • Connections between the 36-pin connector (D-SUB) of the camera and the 100-pin connector of the Matrox Genesis are as follows: <table><tr><th colspan="2">TAKENAKA FC-800 (36-pin connector)</th><th></th><th colspan="2">GEN-DIG-BRD/R/_ (100-pin connector)</th></tr><tr><th>Pin name</th><th>Pin no.</th><th></th><th>Pin name</th><th>Pin no.</th></tr><tr><td>DO 0+</td><td>15</td><td>→</td><td>DATA, INPUT, 0+</td><td>01</td></tr><tr><td>DO 0-</td><td>16</td><td>→</td><td>DATA, INPUT, 0-</td><td>02</td></tr><tr><td>DO 1+</td><td>17</td><td>→</td><td>DATA, INPUT, 1+</td><td>03</td></tr><tr><td>DO 1-</td><td>18</td><td>→</td><td>DATA, INPUT, 1-</td><td>04</td></tr><tr><td>DO 2+</td><td>19</td><td>→</td><td>DATA, INPUT, 2+</td><td>05</td></tr><tr><td>DO 2-</td><td>20</td><td>→</td><td>DATA, INPUT, 2-</td><td>06</td></tr><tr><td>DO 3+</td><td>21</td><td>→</td><td>DATA, INPUT, 3+</td><td>07</td></tr><tr><td>DO 3-</td><td>22</td><td>→</td><td>DATA, INPUT, 3-</td><td>08</td></tr></table> continued	TAKENAKA FC-800 (36-pin connector)			GEN-DIG-BRD/R/_ (100-pin connector)		Pin name	Pin no.		Pin name	Pin no.	DO 0+	15	→	DATA, INPUT, 0+	01	DO 0-	16	→	DATA, INPUT, 0-	02	DO 1+	17	→	DATA, INPUT, 1+	03	DO 1-	18	→	DATA, INPUT, 1-	04	DO 2+	19	→	DATA, INPUT, 2+	05	DO 2-	20	→	DATA, INPUT, 2-	06	DO 3+	21	→	DATA, INPUT, 3+	07	DO 3-	22	→	DATA, INPUT, 3-	08
TAKENAKA FC-800 (36-pin connector)			GEN-DIG-BRD/R/_ (100-pin connector)																																																
Pin name	Pin no.		Pin name	Pin no.																																															
DO 0+	15	→	DATA, INPUT, 0+	01																																															
DO 0-	16	→	DATA, INPUT, 0-	02																																															
DO 1+	17	→	DATA, INPUT, 1+	03																																															
DO 1-	18	→	DATA, INPUT, 1-	04																																															
DO 2+	19	→	DATA, INPUT, 2+	05																																															
DO 2-	20	→	DATA, INPUT, 2-	06																																															
DO 3+	21	→	DATA, INPUT, 3+	07																																															
DO 3-	22	→	DATA, INPUT, 3-	08																																															

Application Note:

Interfacing non-standard cameras to Matrox Genesis



TAKENAKA FC-800

March 28, 2000

Cabling Requirements	TAKENAKA FC-800 (36-pin connector)		GEN-DIG-BRD/R/_ (100-pin connector)	
	<i>Pin name</i>	<i>Pin no.</i>	<i>Pin name</i>	<i>Pin no.</i>
	DO 4+	23	→ DATA, INPUT, 4+	09
	DO 4-	24	→ DATA, INPUT, 4-	10
	DO 5+	25	→ DATA, INPUT, 5+	11
	DO 5-	26	→ DATA, INPUT, 5-	12
	DO 6+	27	→ DATA, INPUT, 6+	13
	DO 6-	28	→ DATA, INPUT, 6-	14
	DO 7+	29	→ DATA, INPUT, 7+	15
	DO 7-	30	→ DATA, INPUT, 7-	16
	DO 8+	31	→ DATA, INPUT, 8+	17
	DO 8-	32	→ DATA, INPUT, 8-	18
	DO 9+	33	→ DATA, INPUT, 9+	19
	DO 9-	34	→ DATA, INPUT, 9-	20
	LDV+	03	→ HSYNC, INPUT, +	33
	LDV-	04	→ HSYNC, INPUT, -	34
	FDV+	05	→ VSYNC, INPUT, +	35
	FDV-	06	→ VSYNC, INPUT, -	36
	CLK+	01	→ CLOCK, INPUT, +	39
	CLK-	02	→ CLOCK, INPUT, -	40
	VINIT	14	← EXPOSURE1, OUTPUT, TTL	87*
* This connection not required for this mode, however allows this cable to be used with all modes.				
	Mode 2: Asynchronous Reset			
	• DBHD100-TO-OPEN cable and GEN/DIG/BRD/R/_ board required for digital data, synchronization and control signals. • All connections between the 36-pin connector (D-SUB) of the camera and the 100-pin connector of the Matrox Genesis are as in <i>Mode 1: Continuous</i>			

The DCF(s) mentioned in this application note can be found on the MIL and Native Library CD, or our FTP site ([ftp.matrox.com](ftp:matrox.com)). The information furnished by Matrox Electronics System, Ltd. is believed to be accurate and reliable. Please verify all interface connections with camera documentation or manual. Contact your local sales representative or Matrox Sales office or Matrox Imaging Applications at 514-822-6061 for assistance.

Corporate headquarters:

Canada and U.S.A.

Matrox Electronic Systems Ltd.
1055 St. Regis Blvd.
Dorval, Quebec H9P 2T4
Canada
Tel: (514) 685-2630
Fax: (514) 822-6273

