

Matrox Odyssey eCL/XCL

Camera Interface Application Note

PULNiX TM-6740CL

September 20, 2006

Basics about the camera

Mode of operations as per Matrox Imaging (in parentheses as per camera manufacturer)

Basics about the interface modes

Camera Descriptions

- Effective resolution: $640 \times 480 \times 10\text{-bit}$ @ 200 fps.
- Camera Link BASE interface (Dual tap).
- Progressive scan.
- Internal sync.
- Internal or external exposure control.
- 40 MHz pixel clock rate.


Interface Mode

- Continuous
- Pseudo-continuous
- Asynchronous reset (Pulse width control)

Camera Interface Briefs

Mode 1: Continuous

- $640 \times 480 \times 10\text{-bit}$ @ 200 fps.
- Camera Link BASE interface (Dual tap).
- Progressive scan.
- Matrox Odyssey eCL/XCL receiving LDV, FDV, CLK and video signal from camera.
- DCF used: [TM6740CL640x480Con.DCF](#)

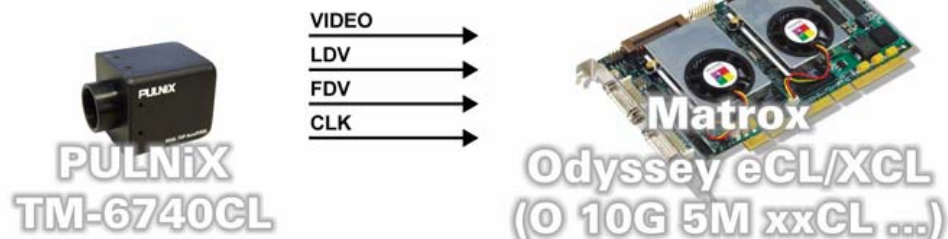

Mode 2: Pseudo-continuous

- $640 \times 480 \times 10\text{-bit}$.
- Camera Link BASE interface (Dual tap).
- Progressive scan.
- Matrox Odyssey eCL/XCL sending periodic EXPOSURE1 (CC1) signal to camera to initiate and control exposure time.
- Matrox Odyssey eCL/XCL receiving LDV, FDV, CLK and video signal from camera.
- DCF used: [TM6740CL640x480Pcon.DCF](#)

Matrox Odyssey eCL/XCL

Camera Interface Application Note


PULNiX TM-6740CL

September 20, 2006

Basics about the
interface modes


Camera Interface Briefs (cont.)

Mode 2: Pseudo-continuous

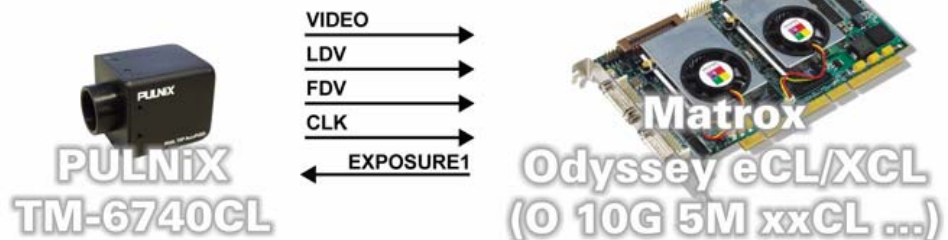

Mode 3: Asynchronous reset

- 640 × 480 × 10-bit.
- Camera Link BASE interface (Dual tap).
- Progressive scan.
- Matrox Odyssey eCL/XCL receiving external trigger signal.
- Matrox Odyssey eCL/XCL sending EXPOSURE1 (CC1) signal to camera to initiate and control exposure time.
- Matrox Odyssey eCL/XCL receiving LDV, FDV, CLK and video signal from camera.
- DCF used: [TM6740CL640x480Async.DCF](#)

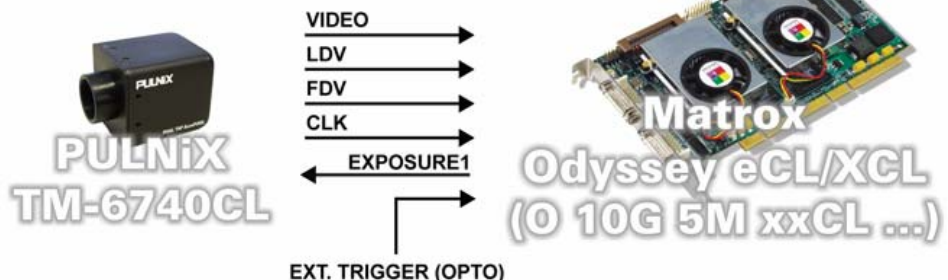

Specifics about the
interface modes

Camera Interface Details

Mode 1: Continuous

- **Frame Rate:** Matrox Odyssey eCL/XCL receives the continuous video from the camera at 200 frames per second.
- **Exposure time:** Exposure time is determined by the shutter setting. Refer to the camera manual for more information.
- **Camera control settings:** Use the PULNiX camera control software to set the camera to **Continuous** mode as follows:

Control	Setting
Shutter Mode	Manual
Shutter Switch	0 (default)
Digital Output	10-bit

Matrox Odyssey eCL/XCL

Camera Interface Application Note

PULNiX TM-6740CL

September 20, 2006

Specifics about the
interface modes

Camera Interface Details (cont.)

Mode 2: Pseudo-continuous

- **Frame Rate and Exposure Time:** Frame rate is determined by the EXPOSURE1 (CC1) setting in the DCF. Changing the frequency (delay period) will control the frame rate, while changing the width (falling edge to rising edge) of EXPOSURE1 (CC1) will control the frame rate as well as exposure time. The frame rate and exposure time can be modified using Matrox Intellicam, with the ONL imCamControl() or imDigControl() function, or with the MIL MdigControl() function. Refer to the respective manual for more information.
- **Camera control settings:** Use the PULNiX camera control software to set the camera to **Pulse Width Async Shutter** mode as follows:

Control	Setting
Shutter Mode	ASYNC SHUTTER
Shutter Switch	9
Digital Output	10-bit

Mode 3: Asynchronous reset

- **Frame Rate:** The frame rate is determined by the frequency of the external trigger signal as well as the width (falling edge to rising edge) of EXPOSURE1 (CC1).
- **Exposure time:** The width (falling edge to rising edge) of the EXPOSURE1 (CC1) signal is the exposure time. The exposure time can be modified using Matrox Intellicam, ONL imCamControl() or imDigControl() function, or with the MIL MdigControl() function. Refer to the respective manual for more information.
- **Camera control settings:** Use the PULNiX camera control software to set the camera to **Pulse Width Async Shutter** mode as follows:

Control	Setting
Shutter Mode	ASYNC SHUTTER
Shutter Switch	9
Digital Output	10-bit

Cabling details
for the interface modes

Cabling Requirements

Modes 1 and 2: Continuous and Pseudo-continuous

- **Cable and Connection:** Standard Camera Link cable.

Matrox Odyssey eCL/XCL

Camera Interface Application Note

PULNiX TM-6740CL

September 20, 2006

*Cabling details
for the interface modes*

Cabling Requirements (cont.)

Mode 3: Asynchronous reset

- **Cable and Connection:** Standard Camera Link.
- **External trigger:** External trigger should be connected to the OPTO TRIG input of the 9-pin connector (pins 7 and 2) on the Expanded I/O adapter bracket.

EXPANDED I/O BRACKET (9-pin connector)

				External Trigger Source	
OPTOTRIG +	07	←		SIGNAL	--
OPTOTRIG -	02	←		GROUND	--

The DCFs mentioned in this application note are also attached (embedded) to this PDF file – use the Adobe Reader's View File Attachment to access the DCF files. The information furnished by Matrox Electronics System, Ltd. is believed to be accurate and reliable. Please verify all interface connections with camera documentation or manual. Contact your local sales representative or Matrox Sales office or Matrox Imaging Applications at 514-822-6061 for assistance. © Matrox Electronic Systems Ltd, 2006-2011.

Matrox Electronic Systems Ltd.

1055 St. Regis Blvd.
Dorval, Quebec H9P 2T4
Canada
Tel: (514) 685-2630
Fax: (514) 822-6273
ODY-CID-103

