

Matrox Genesis

Camera Interface Application Note

DALSTAR DS-1x-01M30

November 26, 2002

Basics about the camera

Camera Descriptions

- $1024 \times 1024 \times 12\text{-bit}$ @ 30 fps.
- Single channel LVDS digital video output.
- Progressive scan.
- Internal (separate) sync.
- Internal and external exposure control.
- 40 MHz pixel clock rate.


Interface Modes

- Continuous (no binning, binning)
- Asynchronous reset (no binning, binning)

Camera Interface Briefs


Mode 1: Continuous (no binning)

- $1024 \times 1024 \times 12\text{-bit}$ @ 30 fps.
- Single channel LVDS digital video.
- Progressive scan.
- Matrox Genesis receiving HSYNC, VSYNC, PIXEL CLOCK (@ 40 MHz) and video signals from camera.
- DCF: [1M30C1.DCF](#)

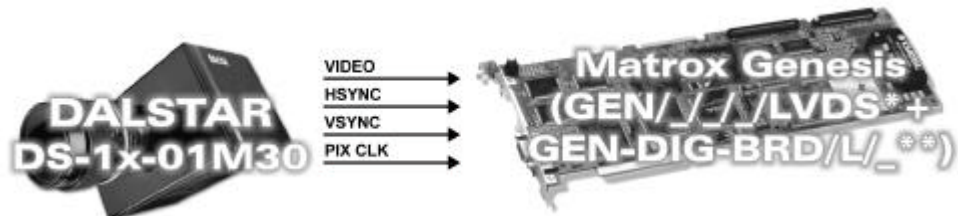

Mode 2: Continuous (Binning)

- Up to $512 \times 512 \times 12\text{-bit}$ @ 60 fps.
- Single channel LVDS digital video.
- Progressive scan.
- Matrox Genesis receiving HSYNC, VSYNC, PIXEL CLOCK (@ 20 MHz) and video signals from camera.
- DCF used: [1M30C2.DCF](#)

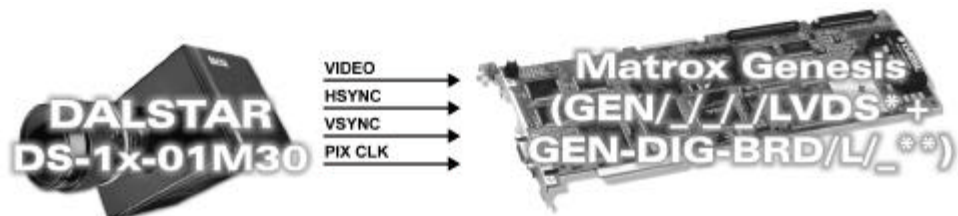

*Matrox Genesis main board with LVDS grab module

**Matrox LVDS digital input board

Mode of operations as per Matrox Imaging (in parentheses as per camera manufacturer)

Basics about the interface modes

Matrox Genesis

Camera Interface Application Note

DALSTAR DS-1x-01M30


November 26, 2002

Basics about the
interface modes

Camera Interface Briefs (continued)


Mode 3: Asynchronous reset (no binning)

- $1024 \times 1024 \times 12$ -bit.
- Single channel LVDS digital video.
- Progressive scan.
- Matrox Genesis receiving TTL external trigger signal.
- Matrox Genesis sending EXPOSURE2 (TRIGGER IN) signal to camera to initiate and control exposure time.
- Matrox Genesis receiving HSYNC, VSYNC, PIXEL CLOCK (@ 40 MHz) and video signals from camera.
- DCF used: [1M30A1.DCF](#)

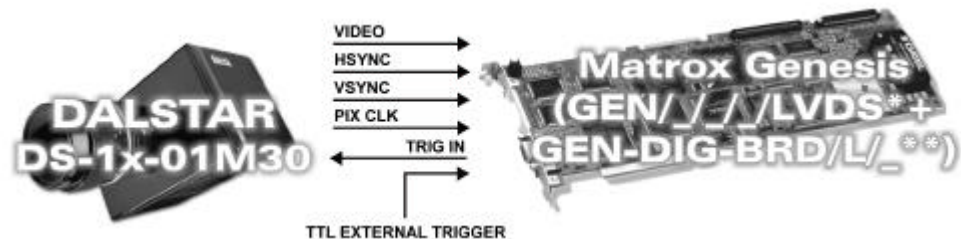

Mode 4: Asynchronous reset (binning)

- $512 \times 512 \times 12$ -bit.
- Single channel LVDS digital video.
- Progressive scan.
- Matrox Genesis receiving TTL external trigger signal.
- Matrox Genesis sending EXPOSURE2 (TRIGGER IN) signal to camera to initiate and control exposure time.
- Matrox Genesis receiving HSYNC, VSYNC, PIXEL CLOCK (@ 20 MHz) and video signals from camera.
- DCF used: [1M30A2.DCF](#)

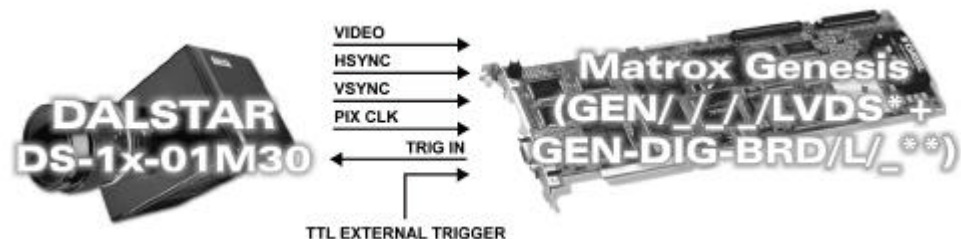

*Matrox Genesis main board with LVDS grab module
** Matrox LVDS digital input board

Matrox Genesis

Camera Interface Application Note

DALSTAR DS-1x-01M30

November 26, 2002

*Specifics about the
interface modes*


Camera Interface Details

Modes 1 and 2: Continuous

- **Frame Rate:** Matrox Genesis receives the continuous video from the camera at 30/60 frames per second (no binning/binning).
- **Exposure time:** Exposure time is inversely proportionate to the frame rate or determined by the shutter setting. Refer to the camera manual for more information.
- **Camera Control:** Camera control settings are made using DALSA's control software. Contact DALSA for more information.

Modes 3 and 4: Asynchronous Reset

- **Frame rate:** The frame rate is determined by the frequency of the external trigger signal.
- **Exposure time:** External trigger source activates EXPOSURE2 (TRIGGER IN)* signal. The width (rising edge to falling edge) of the EXPOSURE2 (TRIGGER IN)* signal is the exposure time. The default exposure time is equal to **60 ms** (no binning) or **32 ms** (binning). The exposure time can be modified in the DCF using Matrox Intellicam, Genesis Native Library (GNL) imCamControl() or with the MIL MdigControl() function. Refer to the respective manual for more information.
- **Camera Control:** External Trigger Mode/Integrate checkbox must be checked in DALSA's control software. Refer to the camera manual for more information.
- **Timing diagram:**

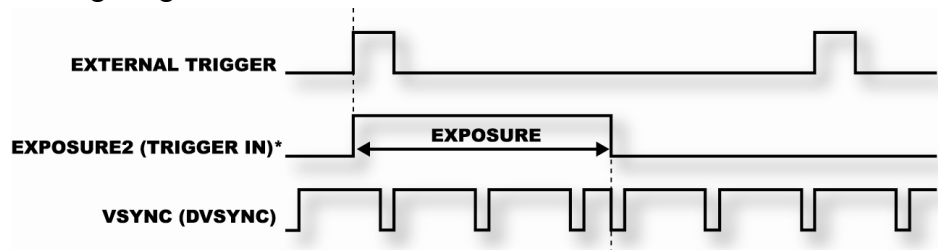

*SMA Connector

Matrox Genesis

Camera Interface Application Note

DALSTAR DS-1x-01M30

November 26, 2002

*Cabling details for this
interface mode*

Cabling Requirements

Modes 1 and 2: Continuous

- **Cable:** DBHD100-TO-OPEN (open ended) cable required for video, synchronization and control signals.
- **Connection:** Connections between the 60-pin quad row connectors (**DATA1**) of the camera and the 100-pin connector of the Matrox Genesis are as follows:

DALSTAR DS-1x-01M30 (60-pin quad row connector- DATA 1)			Matrox Genesis (100-pin connector)	
Pin name	Pin no.		Pin name	Pin no.
D1A0+	01	→	DATA, INPUT, 0+	01
D1A0-	02	→	DATA, INPUT, 0-	02
D1A1+	03	→	DATA, INPUT, 1+	03
D1A1-	04	→	DATA, INPUT, 1-	04
D1A2+	05	→	DATA, INPUT, 2+	05
D1A2-	06	→	DATA, INPUT, 2-	06
D1A3+	07	→	DATA, INPUT, 3+	07
D1A3-	08	→	DATA, INPUT, 3-	08
D1A4+	09	→	DATA, INPUT, 4+	09
D1A4-	10	→	DATA, INPUT, 4-	10
D1A5+	11	→	DATA, INPUT, 5+	11
D1A5-	12	→	DATA, INPUT, 5-	12
D1A6+	13	→	DATA, INPUT, 6+	13
D1A6-	14	→	DATA, INPUT, 6-	14
D1A7+	17	→	DATA, INPUT, 7+	15
D1A7-	18	→	DATA, INPUT, 7-	16
D1A8+	19	→	DATA, INPUT, 8+	17
D1A8-	20	→	DATA, INPUT, 8-	18
D1A9+	21	→	DATA, INPUT, 9+	19
D1A9-	22	→	DATA, INPUT, 9-	20
D1A10+	23	→	DATA, INPUT, 10+	21
D1A10-	24	→	DATA, INPUT, 10-	22
D1A11+	25	→	DATA, INPUT, 11+	23
D1A11-	26	→	DATA, INPUT, 11-	24
D1HSYNC+	58	→	HSYNC, INPUT, +	33
D1HSYNC -	57	→	HSYNC, INPUT, -	34
D1VSYNC+	56	→	VSYNC, INPUT, +	35
D1VSYNC -	55	→	VSYNC, INPUT, -	36
D1GND	45	→	GROUND	37
D1GND	46	→	GROUND	38
D1PCLK-	59	→	CLOCK, INPUT, +	39
D1PCLK +	60	→	CLOCK, INPUT, -	40

Continued...

Matrox Genesis

Camera Interface Application Note

DALSTAR DS-1x-01M30

November 26, 2002

Cabling details for this
interface mode

Cabling Requirements (continued)

Modes 1 and 2: Continuous

- **Connection:** Connections between the SMA/BNC connector of the camera and the 100-pin connector of the Matrox Genesis are as follows:

DALSTAR DS-1x-01M30 (SMA/BNC connector)		Matrox Genesis (100-pin connector)	
Pin name	Pin no.	Pin name	Pin no.
SMA or BNC*	--	← EXPOSURE2, OUTPUT, TTL	88*
GND*	--	-- GROUND	38*

* This connection is not necessary for this mode, however allows the cable to be used for all modes.

Modes 3 and 4: Asynchronous Reset

- **Cable:** DBHD100-TO-OPEN (open ended) and IMG-7W2-TO-5BNC cables required for video, synchronization and control signals.
- **External Trigger:** TTL external trigger source should be connected to the TTL trigger input (Gray BNC) of the IMG-7W2-TO-5BNC cable.
- **Connection:** Connections between the two 60-pin quad row connectors (**DATA1**) of the camera and the 100-pin connector of the Matrox Genesis are as in Mode 1: *Continuous* along with the following:

DALSTAR DS-1x-01M30 (SMA/BNC connector)		Matrox Genesis (100-pin connector)	
Pin name	Pin no.	Pin name	Pin no.
SMA or BNC	--	← EXPOSURE2, OUTPUT, TTL	88
GND	--	-- GROUND	38

The DCF(s) mentioned in this application note can be found on the MIL, Native Library CD or our FTP site ([ftp.matrox.com](ftp:ftp.matrox.com)). The information furnished by Matrox Electronic System, Ltd. is believed to be accurate and reliable. Please verify all interface connections with camera documentation or manual. Contact your local sales representative or Matrox Sales office or Matrox Imaging Applications at 514-822-6061 for assistance.

Corporate headquarters:

Canada and U.S.A.

Matrox Electronic Systems Ltd.
1055 St. Regis Blvd.
Dorval, Quebec H9P 2T4
Canada
Tel: (514) 685-2630
Fax: (514) 822-6273

